The NEW

Pathfinder® Ultra® 6039™ Platinum

# It scans, collects data, prints labels.

And saves you money.



www.pathfinderce.com

[[1:1]]

### 3-in-1 functionality means mark-down has never been easier

Mark-down promotions are an important part of helping your business reduce its waste figures. But when the task of marking down can involve two or more separate machines, a data terminal, scanning device and printer, it becomes a time consuming and costly exercise. That's why the new Paxar Pathfinder<sup>®</sup> 6039<sup>™</sup> is a time-saving and money-saving solution. Combining scanning, data collection and print and apply labelling all in one hand-held machine. It puts leading edge technology and multiple functionality at your fingertips, and will improve productivity.

### It works where you do

With so many useful functions in just one machine, the Pathfinder<sup>®</sup> 6039<sup>™</sup> is far too versatile to use only for mark-down or shelf edge labelling in store. Its rugged construction and durability means you can safely take it into any working environment.

#### **Simplified logistics**

Logistics and distribution operations can be simplified and streamlined, by eliminating the picking slip. Instead, by using the Pathfinder<sup>®</sup> 6039<sup>™</sup>, the host simply directs the operator – via the RF network – to pick, label, apply and pack on the go. Effortless inventory control

Enditiess inventory control

With the Pathfinder<sup>®</sup> 6039,<sup>™</sup> it's easy to identify the correct unloading bay or other location for incoming goods, and direct the delivery accordingly. By using the unit's real-time functionality means the stock system can be kept constantly up to date.



AQn 99p

25 101

### **Key Features**

Robust Durable rubber moulded casing for multiple one meter drops •. **Printer** Prints branded & security labels, tags and receipts

Windows® CE 1/4 VGA high definition touch-screen & 17-key interface

#### **Battery**

The lightweight lithium Ion battery will last an eight hour shift. Hot-swapable, maintaining an active session during the battery change Scanner : Lightweight robust built-in laser barcode scanner

### Connectivity

199 171

016000 024000

STYLE NO 888067 110

AWOS

Green

37

802.11b/g RF network functionality Bluetooth® and USB OnTheGo connectivity with master/slave capability. Compact Flash & SD/MMC card slots

## Print and Apply and more

#### Scanning

The Pathfinder<sup>®</sup> 6039<sup>™</sup> incorporates one of the world's smallest highintensity scanners for fast and accurate data capture.

#### **Data collection**

The optional 802.11b/g RF network functionality allows data collection and processing in real time. Built in USB OnTheGo with master or slave capability and optional Bluetooth® connectivity allows it to be connected to many peripheral devices such as chip'n'pin readers.

#### Labelling

Whatever kind of labels you need to print, the Pathfinder<sup>®</sup> 6039's<sup>™</sup> built-in printer will print them. In addition to branded and security-type labels it will also print on tags and receipt paper.

Loading the print media is quick and easy, with a simple drop-in facility.

## Windows<sup>®</sup> makes it easy

Based on the powerful Microsoft Windows® CE.Net platform, the Pathfinder® 6039<sup>™</sup> has a familiar touch-screen interface, so operators need little training before they're ready to go.

The Windows<sup>®</sup>-based CE platform also eliminates the need for costly and time-

consuming bespoke code writing. The widespread use of the CE platform means the Pathfinder® 6039<sup>™</sup> can be integrated alongside most existing mobile devices, and support a huge number of back-end business systems.

### Pathfinder<sup>®</sup> Ultra<sup>®</sup> 6039<sup>™</sup> Platinum Specifications

Processor

Intel XScale PXA270C
Operating system

Microsoft Windows CE .NET 5

User interface Colour touch-screen display – 1/4 VGA, 240x320

Passive stylus or finger operation

Backlight on/off control, adjustable contrast & brightness Stylus clipped into base of unit attached with Lanyard

Keypad

17-key alphanumeric mobile phone style keypad High durability rubberised keys

#### Printer

52mm (2") wide 8 dots/mm (203dpi) resolution

- 110mm (4") per second print speed
- Barcode symbologies EAN/UCC 8, 13, +2 +5, 128 Interleaved 2 of 5, Extended Code 39 Codabar (NW7), Code 39 / 128, MSI, Code 93
- 2 Dimensional barcodes Maxicode, PDF417, Postnet, Quick Response
   Fonts
- Standard, TrueType & International Fonts Application software

#### Windows® CE .NET

Internet Explorer 6.0 for CE

Wireless network management software suite

Wavelink & Odyssey

Microsoft ActiveSync

Application software Control scanner, printer, media loading & calibration

#### Programming environment

Visual Studio .NET - Windows® Sockets Pathfinder SDK

Hardware APIs

Programming languages

VB.Net C#.Net

Indicators

Internal speaker with volume control LED indicating scanner performance

Barcode applications Symbol lightweight laser scanner – SE923 Optional high-speed scanner – SE923HS

Expansion slots One Compact Flash card slot One SD/MMC memory card slot

High-speed USB OnTheGO port

Wireless communications Expansion slots available: 802.11b (via Compact Flash)

Bluetooth<sup>®</sup> (via CF or SD/MMS slot) External ports

tem

USB OnTheGO host/slave port

#### Power management

High-capacity Lithium Ion battery (7.2V, 2200mAH) Quick battery change door Comprehensive battery gas gauge, independent printer gauge Battery and optional AC power handle for fixed location operation Built in rechargeable backup battery **Environmental (standard)** Operating temp:+4°C to +45°C Storage temp:-40°C to +80°C Humidity: 5% to 90% RH non-condensing Shock: Drop test of 1.8m (6ft) onto solid concrete

Physical dimensions

Weight: 940g (2lbs) with battery Height – 165mm

Width – 197mm

Depth – 83mm

Power accessories

AC power supply Single slot battery charger

Four station battery charger

Backup battery storage charger

Carrying accessories Handstrap – lanyard

Luxury hand strap


Shoulder strap Holster

Approvals

Safety: NRTL to UL60950, CSA C22.2 No 60950 EN 60950

EMC: FCC Part 15 (Class B) EN 55022 (Class B) EN 55024 Laser: IEC 60825-1,Class 2 FDA 21 CFR 1040.10, 1040.11 Class II

70)

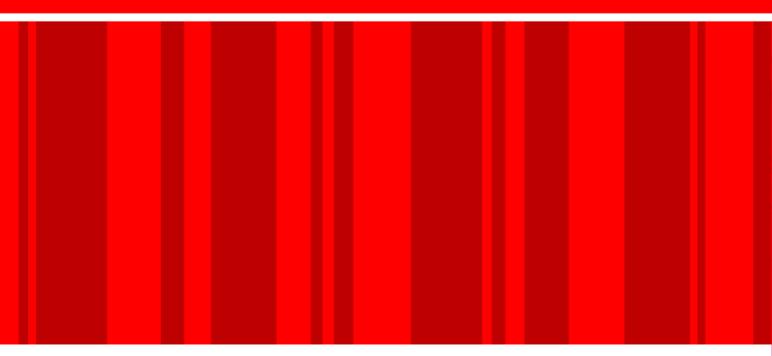

GOMARO s.a.

Paxar Monarch La Rosaire 5 1123 Aclens Switzerland

**Tel:** +41 (0)21 8699770 **Fax:** +41 (0)21 8699602 www.gomaro.ch email: info@gomaro.ch



www.gomaro.ch

BRA620 – @2005 Paxar UK Ltd – All rights reserved